



MaxAW05-Series

Small Servo Robot
IMM RANGE 280 – 300 Ton




MaxAW05-1100P	Standard			Metric	
Movement	Drive Type	Servo Telescoping Vertical Arm		Servo Telescoping Vertical Arm	Drive Type
IMM Range	US Tons	280 - 300		2491 - 2669	kN
Vertical Stroke	in	43.31		1100	mm
Single Arm Strip	in	39.37		1000	mm
Traverse	in	70.87		1800	mm
Gripper Angle	°	90		90	°
Max Load	lbs	13.23		6	kg
Weight	lbs	816		370	kg
Drive System	Drive	AC Servo Motor		AC Servo Motor	Drive
Working Air Pressure	psi	71.12 ~ 113.81		5 ~ 8	kg/cm ²
Air Consumption	Fluid oz	33.81		1	NI/cycle
Max Current	Amps	8.9		8.9	I
Power Supply	Power Supply	480VAC - 3 Phase - 60 Hz		480VAC - 3 Phase - 60 Hz	Power Supply



MaxAW05-Series

Small Servo Robot
IMM RANGE 280 – 300 Ton

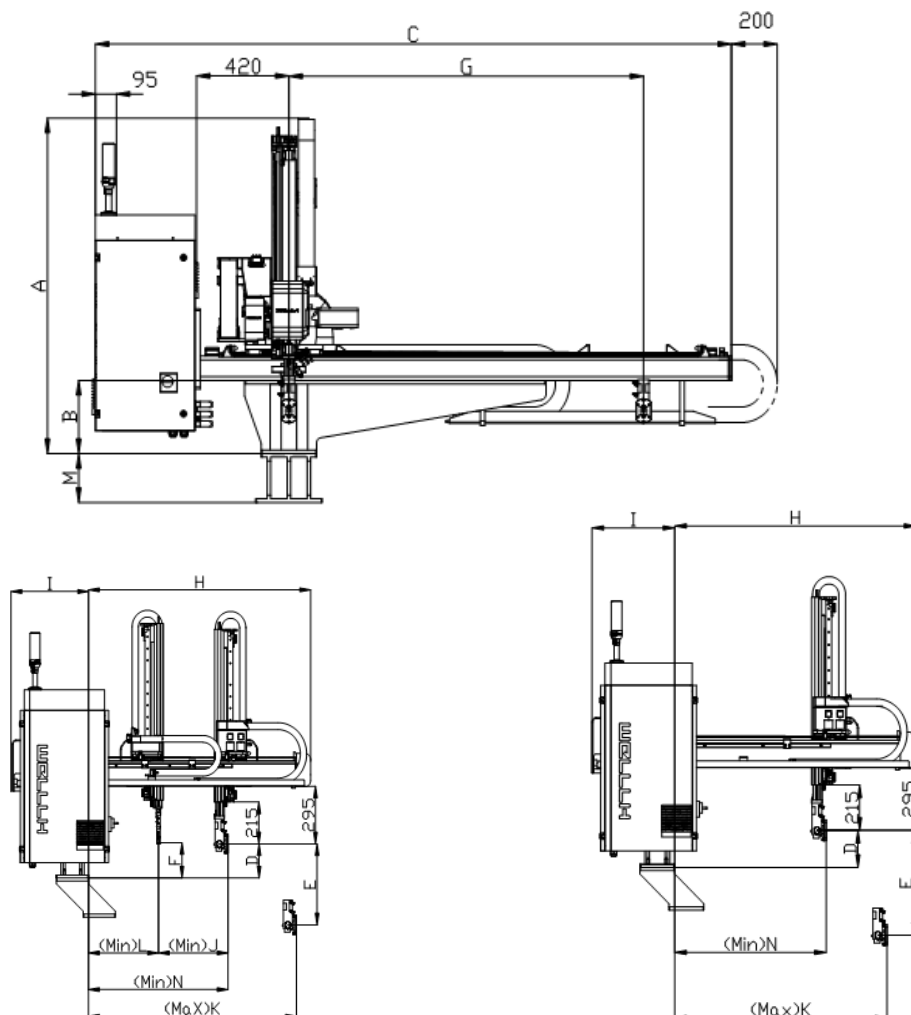

MaxAW05-1100P	Standard (in)	Metric (mm)
A	55.91	1420
B	11.81	300
C	118.11	3000
D	7.09	180
E	43.31	1100
G	70.87	1800
H	57.09	1450
I	17.13	435
K	47.24	1200
M	7.87	200
N	6.3	160

Specifications subject to change due to technical advances